




# Hard drive Replacing why! W253EU (German)

Follow these instructions to the hard drive replaced.

Written By: Felice Suglia

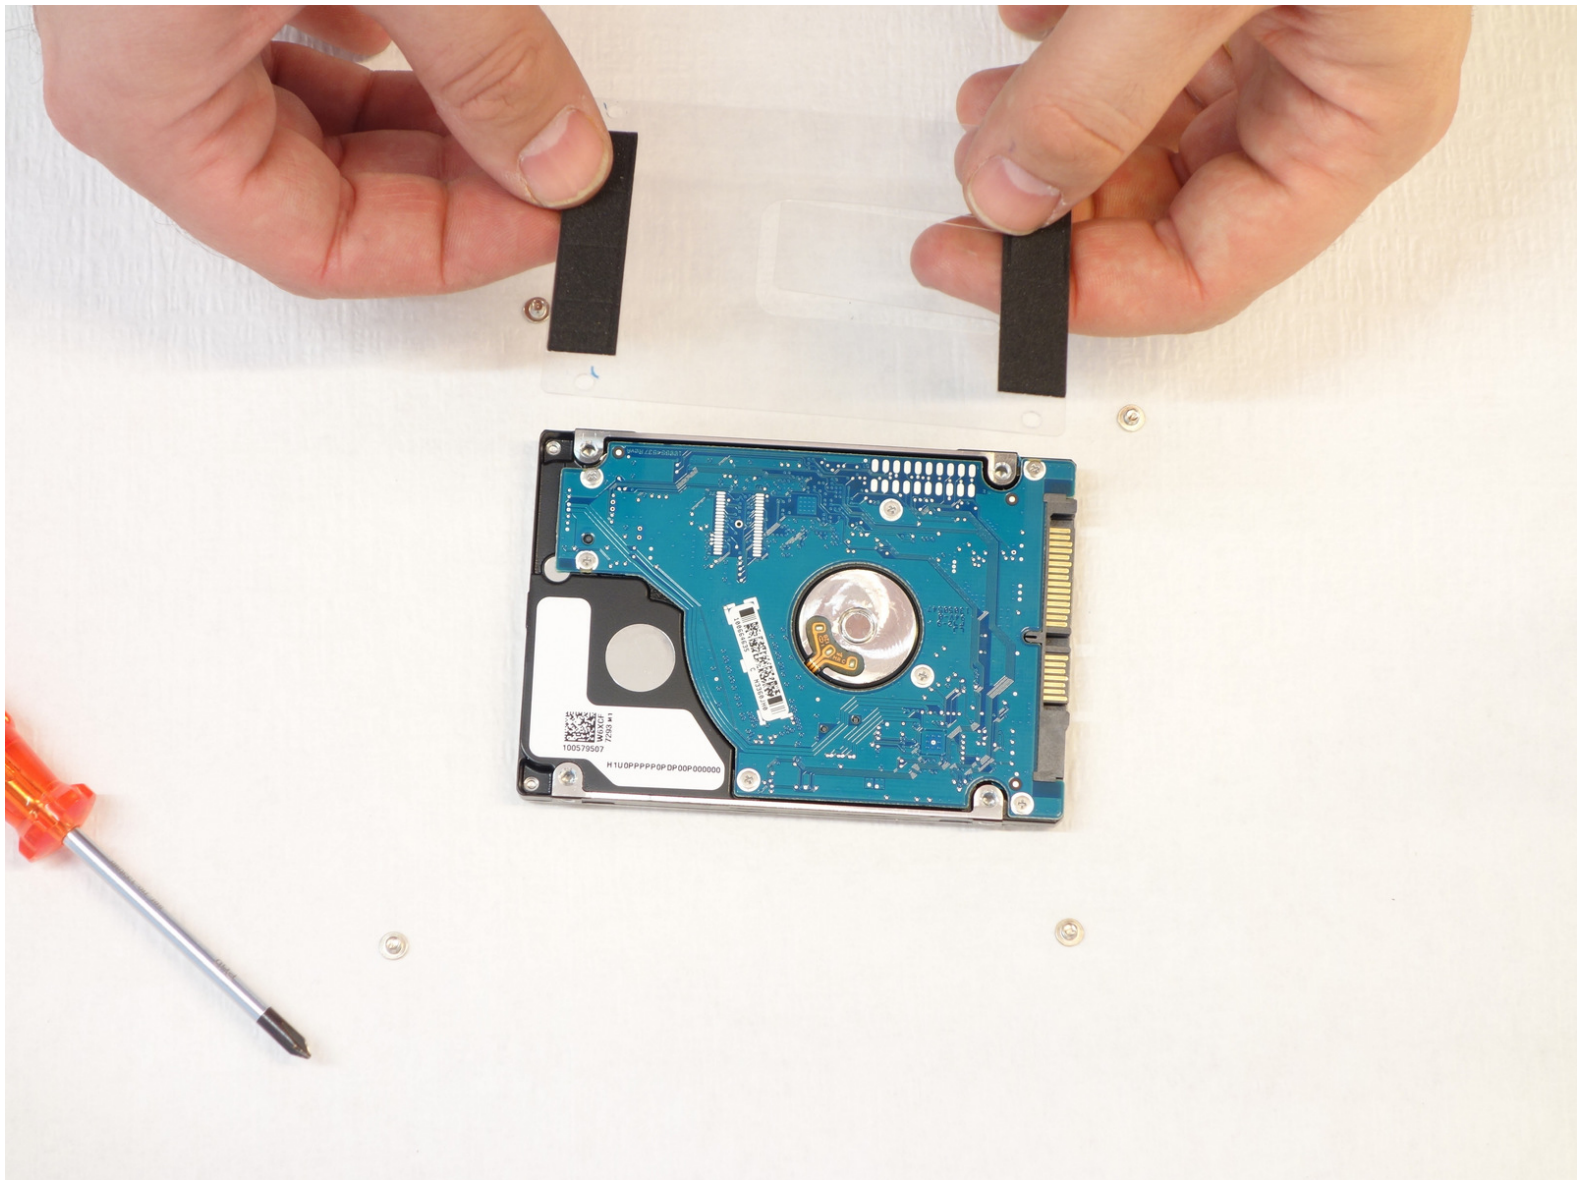

## INTRODUCTION

The same instructions can also for replacing the original hard drive (SATA 500 GB, 5,400 U / min) can be used by a more powerful hard drive or a SSD hard drive.



### TOOLS:


- [Phillips #1 Screwdriver](#) (1)



### PARTS:


- [500 GB 5400 RPM 2.5" Hard Drive](#) (1)

## Step 1 — battery pack

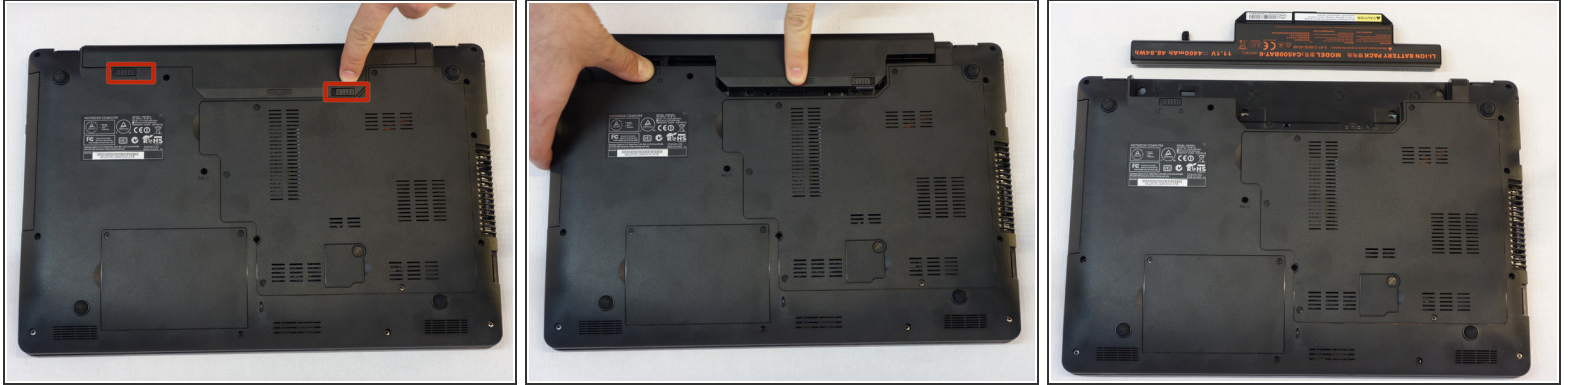

- off computer.
- Before each handle, it is important to start the expansion of the accumulator.
- bring in unlocked position slider Removing the battery.



## Step 2 — HDD

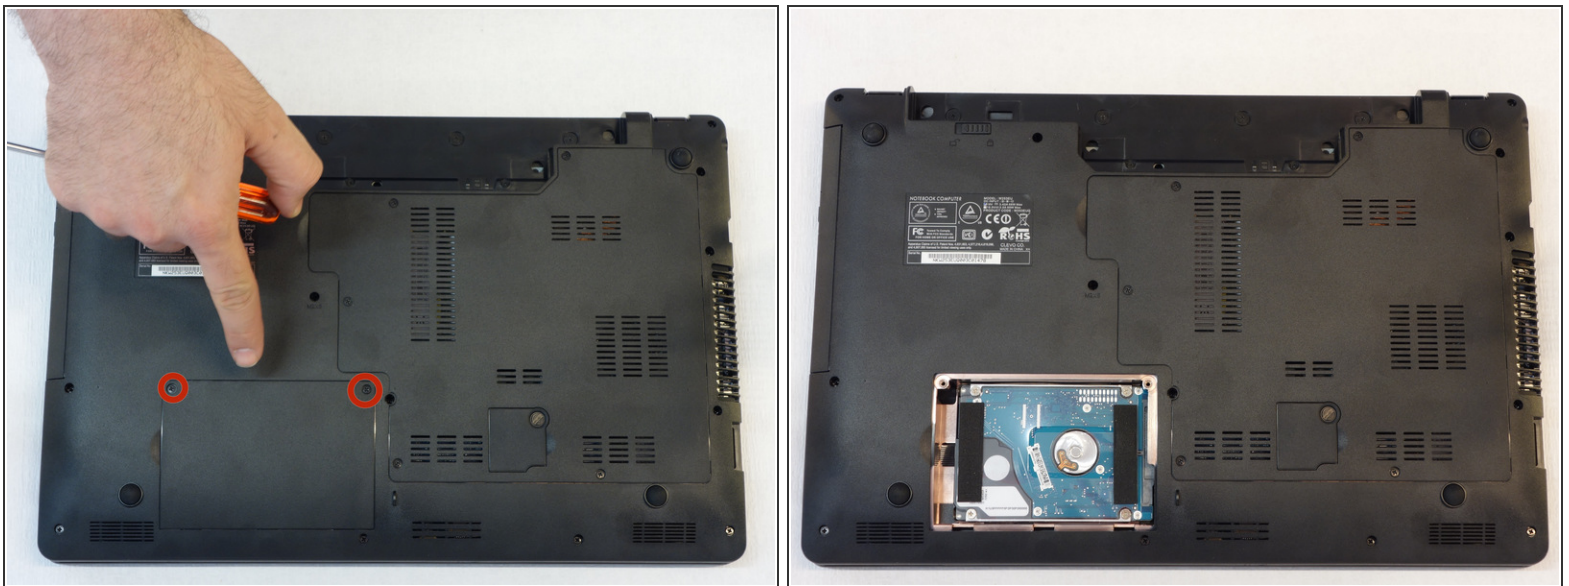

- By unregistering screwdriver Phillips # 1, cover the hard drive.
- Detecting the transparent plate to the hard flap from SATA to disconnect plug.



## Step 3

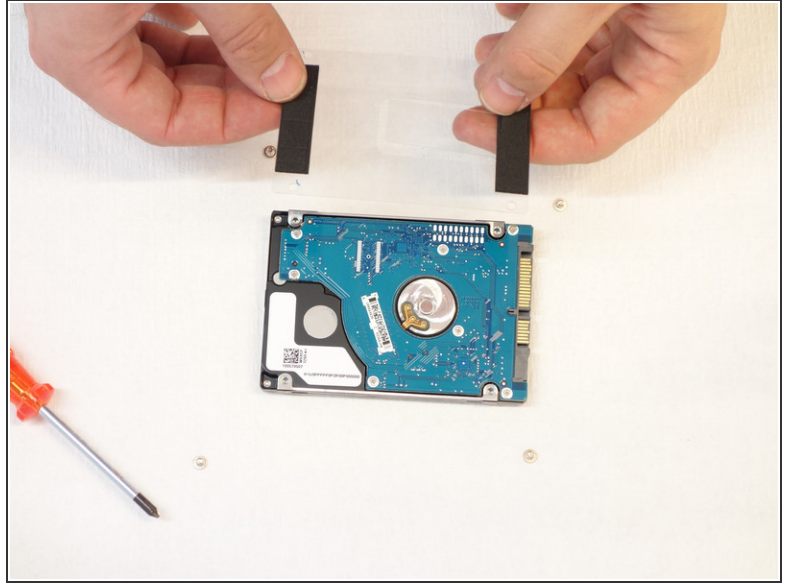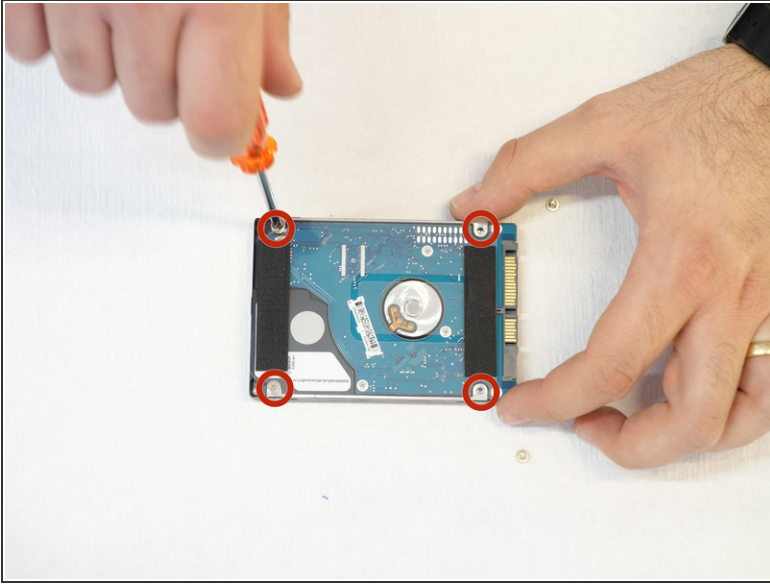

- With the screwdriver Phillips # 1, unscrew the four screws securing the plastic cover off.
- This cover is then mounted on the new hard drive.

Für den Zusammenbau die Instruktionen in umgekehrter Reihenfolge ausführen.

This document was last generated on 2017-06-24 07:10:47 AM.